

SPRINGWOUND INTERVAL TIMER

Series 487

General Description

This heavy duty, springwound timer functions as a time only unit with an audible ring to indicate end of timing cycle.

Features

- Easy to set springwound timer
- 5 second mechanical bell duration
- Signal duration independent of running time
- Friction for correction of setting
- Running times: 15, 30, and 60 minutes
- Compact design
- Dial plates and mounting accessories available

Applications

Popular applications include: household appliances, foodservice equipment, outdoor grills, and process equipment



BORG GENERAL CONTROLS

1386 Jarvis Avenue
Elk Grove Village, IL 60007

800/338-1260
847/640-4635
F: 847/640-7934

e-mail: sales@borggeneral.com
www.borggeneral.com

SPRINGWOUND INTERVAL TIMER

Series 487

Technical Data


Signal duration:
5 seconds (approx.)

Ambient temperature range:
35°F (0°C) to 257°F (125°C)

Operating torques (maximums):
● Setting: 0.45 Nm
● Return: 0.6 Nm

Push-on load for knob:
200 N without shaft support
(maximum permissible)

Face plate available

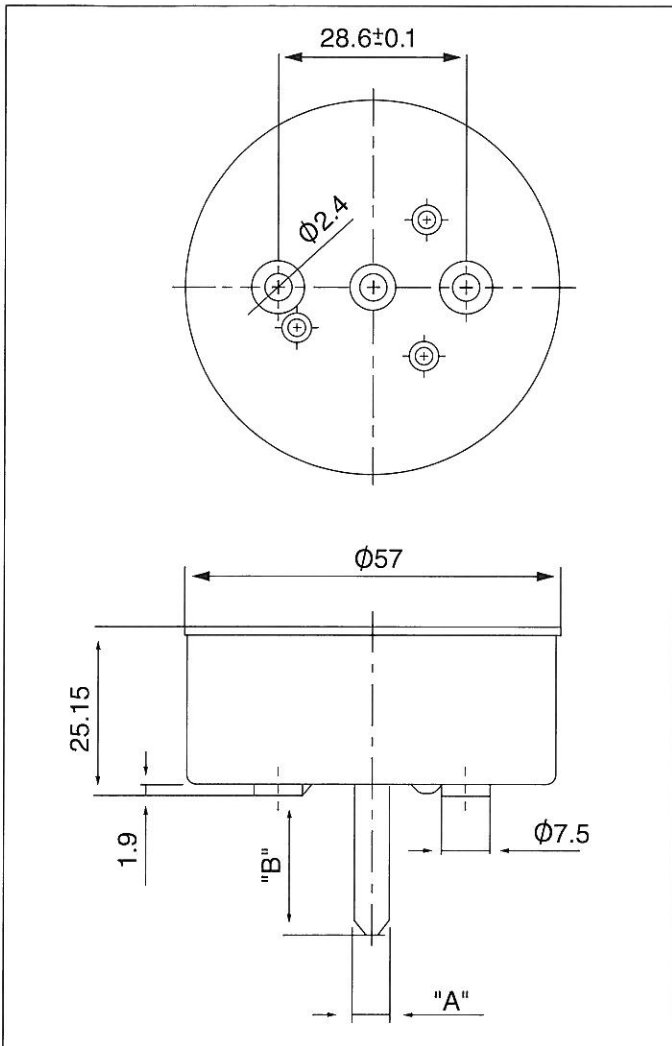

DIEHLControls

BORG GENERAL CONTROLS LLC.
1386 Jarvis Avenue
Elk Grove Village, IL 60007

800/338-1260 F: 847/640-7934

©2002 Borg General Controls LLC.

Printed in U.S.A.